
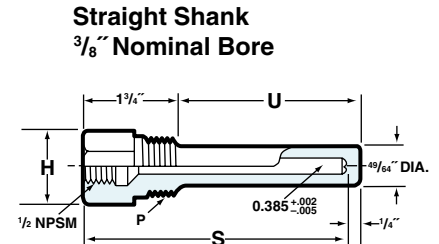


Thermowells Threaded Configuration

Stepped & Straight Shank

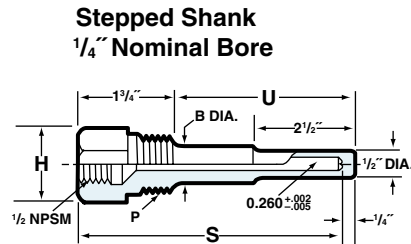

Legend: U = Shank length under threads P = Process connection NPT S = Bore depth = instrument element length including threads
 B = Shank base diameter H = Hex size across flats

P	H	B*
1/2"	1.125"	.62"
3/4"	1.125"	.75"
1"	1.375"	.87"

*Stepped shank only, RT

Dimensions (inches)			Part Numbers	
S	U	P	1/4" Bore (.260)	3/8" Bore (.385)
2 1/2	1 5/8	3/4	75W0162SM260	75W0162SM385
		1	10W0162SM260	10W0162SM385
4	2 1/2	1/2	50W0250ST260	N.A.*
		3/4	75W0250ST260	75W0250ST385
		1	10W0250ST260	10W0450ST385
6	4 1/2	1/2	50W0450RT260	N.A.*
		3/4	75W0450RT260	75W0450ST385
		1	10W0450RT260	10W0450ST385
9	7 1/2	1/2	50W0750RT260	N.A.*
		3/4	75W0750RT260	75W0750ST385
		1	10W0750RT260	10W0750ST385
12	10 1/2	1/2	50W1050RT260	N.A.*
		3/4	75W1050RT260	75W1050ST385
		1	10W1050RT260	10W1050ST385
15	13 1/2	1/2	50W1350RT260	N.A.*
		3/4	75W1350RT260	75W1350ST385
		1	10W1350RT260	10W1350ST385
18	16 1/2	1/2	50W1650RT260	N.A.*
		3/4	75W1650RT260	75W1650ST385
		1	10W1650RT260	10W1650ST385
24	22 1/2	1/2	50W2250RT260	N.A.*
		3/4	75W2250RT260	75W2250ST385
		1	10W2250RT260	10W2250ST385

*Not available