

# MAO Series 500 FLOW METER

Monitoring Lower Flows of Corrosive and Non-Corrosive Liquids.

## FEATURES

- No Bearings
- Single Moving Part
- In Line Metering
- No Rotating Internals
- Materials: Teflon, Brass or 316SS
- Output: Analog, Digital or Current Loop
- Measures Low Flows

## KEY FEATURES

All Teflon® wetted parts model available.  
No seals. Undamaged by over ranging.

## OPERATION

When fluid flows through the unit it displaces the Teflon®-encapsulated magnetic piston. This displacement is proportional to the volumetric flow through the unit. A transducer, encapsulated in the body outside the fluid path, senses the displacement of the piston. The transducer's signal is converted by a microprocessor-based conditioning circuit then sends the signal to three types of outputs: voltage, pulse and current loop.

- TOTAL ACCURACY:  $\pm 5\%$
- REPEATABILITY:  $\pm 2\%$  FULL SCALE
- LINEARITY:  $\pm 2\%$  FULL SCALE

## TEMPERATURE OPERATING RANGE

- AMBIENT: 0° to 125° F (-18° to 52° C)
- MEDIA: 0° to 180° F (-18° to 82° C)

## MECHANICAL SPECIFICATIONS

MODEL	WEIGHT LBS. (Kg)	MAX WORKING PRESSURE PSIG (barg)	WETTED PARTS
MAO-500-T	1.3 (0.6)	80 (5.52)	Teflon®
MAO-500-B	3.4 (1.54)	1500 (103.42)	Brass, Teflon®
MAO-500-S	3.4 (1.54)	3000 (206.84)	316SS, Teflon®

Polypropylene Cover, Viton® Gasket and Stainless Steel Hardware.

## PRESSURE LOSS TABLE

MODEL BODY		LINEAR RANGE LPM (GPM)	$\Delta P$ MBARS (PSID)
MAO-500-AA	Minimum	1.89 (0.5)	27.58 (0.40)
	Maximum	7.57 (2.0)	31.03 (0.45)
MAO-500-BB	Minimum	3.79 (1.0)	27.58 (0.40)
	Maximum	13.25 (3.5)	68.95 (1.0)

CE Recognized 73/23/EEC/93/68/EEC

Recognized File E75356

## APPLICATIONS

- Wet Benches
  - Cooling Systems
  - Corrosive Chemical Dispensing
  - Materials Consumption Measurement
  - Process Controls
- Patent No's  
4,858,647  
4,905,844  
5,033,311  
Others may apply.



# ChemTec

## CALIBRATION IN WATER

MODEL	GPM (LPM)	VDC	Hz	mA	PORTS FNPT
MAO500XAA	0	0	0	0	1/2"
	0.5 (1.89)	1	40	4	
	0.75 (2.84)	2	80	8	
	1.25 (4.73)	3	120	12	
	1.75 (6.62)	4	160	16	
MAO500XBB	2.00 (7.57)	5	200	20	1/2"
	0	0	0	0	
	1 (3.79)	1	40	4	
	1.6 (6.06)	2	80	8	
	2.2 (8.33)	3	120	12	
	2.8 (10.60)	4	160	16	
	3.5 (13.25)	5	200	20	

# MAO Series 500 FLOW METER

Monitoring of Corrosive and Non-Corrosive Liquids.

## ELECTRICAL SPECIFICATIONS

### POWER REQUIREMENTS:

VOLTAGE: REGULATED 15 – 30 VDC

CURRENT: 250 mA

### OUTPUTS:

ANALOG: 0 – 5 VDC,

Minimum Load Impedance: 5k ohm in parallel with 250pf

### DIGITAL:

200 Hz, Square wave 50% duty cycle TTL compatible output.

### CURRENT LOOP:

Current Loop: 4 - 20 mA

Loop Load : 100Ω ±1% 1/4 watt

### WIRE CONNECTION:

RED – (+)

BLACK – (Common)

WHITE – (Frequency)


GREEN – (Voltage)

ORANGE – (Current)

## HOW TO ORDER

(Sales@ChemTec.com | (800) 222-2177)

Model	Size	Materials	Flow Range
MAO	500	T Teflon® B Brass S Stainless Steel	(See Chart) AA BB

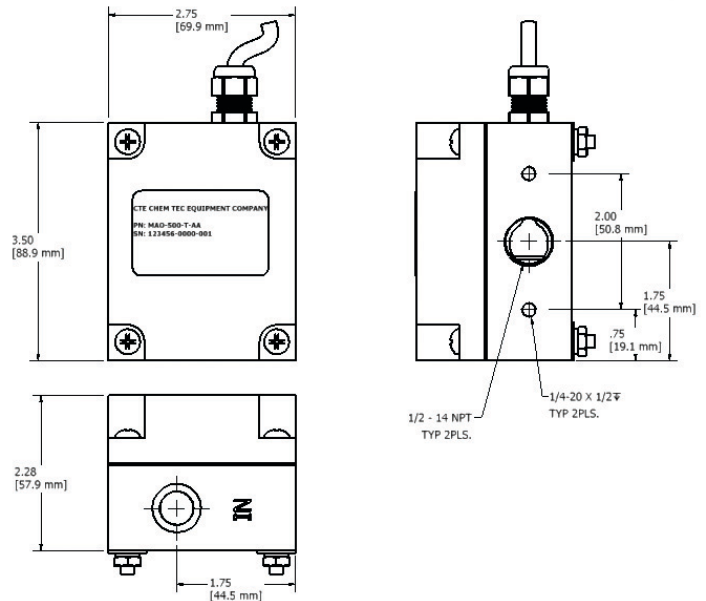

## INSTALLATION

Control valves should be placed downstream of the MAO flow meter. The flow meter should never be installed so that it drains completely when flow ceases.

When particles maybe present in the media, a filter should be installed ahead of the flow meter. It is advisable to filter to 10 microns.

The MAO flow meter should not be located near ferrous material or near strong electro-magnetic fields.

The MAO flow meter is sensitive to velocity profile disturbances in the flow stream. It is advisable that straight lengths of 10 inside diameters upstream and 5 inside diameters downstream be used.

All lines should be completely purged of air before use.

The use of pipe paste is not recommended. Use care when using Teflon tape to avoid shreds from entering the MAO flow meter.

## MOUNTING

Mount with INLET vertical, INLET port down, OUTLET port horizontal.