




Multi-Function Timer


- **13 Functions**
- **10 Time Ranges**
- **Front knobs for Time Range, Time Scale & Mode Setting**
- **Slim, Space Saving Design**
- **DIN Rail Mount**

DIMENSIONS (MILLIMETERS)

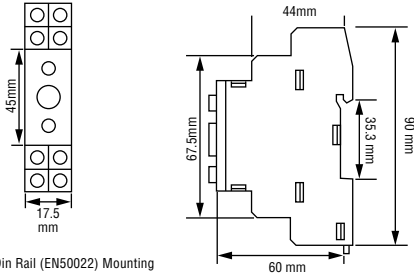

Symmetrical 35mm Din Rail (EN50022) Mounting

TERMINAL CONNECTIONS

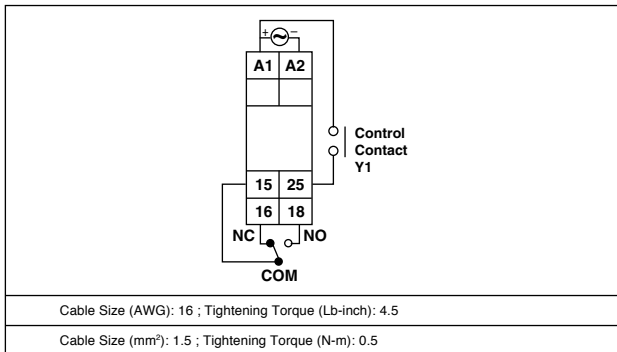

SPECIFICATIONS

ACCURACY	Setting: $\pm 5\%$ of F.S. Repeat: $\pm 0.5\%$ (F.S. = Full Scale)
RESET	Reset time < 100 msec
OUTPUT CONTACT	SPDT (1 C/O)
CONTACT RATING	NO/5A, NC/3A @ 250V AC
MODES	On delay (A) Interval (B) Cyclic equal OFF first (C) Cyclic equal ON first (Ci) Pulse output, 500ms fixed (D) Delay on break (E) Delay on make / Delay on break (F) Interval after break (H) Single shot (I) Retriggerable Single shot (J) Latching relay (K) Delay with Totalize (Ai) Interval with Totalize (Bi)
TIME RANGES	0.1 - 1 sec, 0.3 - 3 sec, 1-10 sec, 3-30 sec 0.1-1 min, 0.3-3 min, 1-10 min, 3-30 min 0.1-1 hr, 0.3-3 hr
SUPPLY VOLTAGE	20-240V AC, 12-240V DC AC : (50 / 60 Hz)
POWER CONSUMPTION	43.2VA max
TEMPERATURE	Operating: 0 to 50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F)
HUMIDITY (NON-CONDENSING)	95% RH
WEIGHT	0.163 lbs.
PROTECTION LEVEL	IP40 for Casing IP20 for Terminals

ORDERING INFORMATION

PART NO.	SUPPLY VOLTAGE
175MU	20-240V AC/DC 12-240V DC

TIMING DIAGRAMS

