

MAO Series 125/250 FLOW METER

Monitoring Lower Flows of Corrosive and Non-Corrosive Liquids.

FEATURES

- No Bearings
- Single Moving Part
- In Line Metering
- No Rotating Internals
- Materials: Teflon, Brass or 316SS
- Output: Analog or Digital
- Measures Low Flows

KEY FEATURES

All Teflon® wetted parts model available.
No seals. Undamaged by over ranging.

APPLICATIONS

- Wet Benches
 - Cooling Systems
 - Corrosive Chemical Dispensing
 - Materials Consumption Measurement
 - Process Controls
- Patent No's
4,858,647
4,905,844
5,033,311
Others may apply.



OPERATION

When fluid flows through the unit it displaces the Teflon® encapsulated magnetic piston. This displacement is proportional to the volumetric flow through the unit. A transducer, encapsulated in the body outside the fluid path, senses the displacement of the piston. The transducer's signal is converted by a microprocessor-based conditioning circuit then sends the signal to three types of outputs: voltage, pulse and current loop.

- TOTAL ACCURACY: ± 5%
- REPEATABILITY: ± 2% FULL SCALE
- LINEARITY: ± 2% FULL SCALE

TEMPERATURE OPERATING RANGE

- AMBIENT: 0° to 125° F (-18° to 52° C)
- MEDIA: 0° to 180° F (-18° to 82° C)

MECHANICAL SPECIFICATIONS

MODEL BODY	WEIGHT LBS. (Kg)	MAX WORKING PRESSURE PSIG (barg)	WETTED PARTS
MAO-125/250-T	0.63 (0.29)	80 (5.51)	Teflon®
MAO-125/250-B	1.30 (0.59)	1500 (103.42)	Brass, Teflon®
MAO-125/250-S	1.30 (0.59)	3000 (206.84)	316SS, Teflon®

Polypropylene Cover, Viton® Gasket and Stainless Steel Hardware.

PRESSURE LOSS TABLE

MODEL BODY		LINEAR RANGE ML/M (GPH)	ΔP MBARS (PSID)
MAO-125-AA	Minimum	20 (0.32)	24.82 (0.36)
	Maximum	70 (1.11)	42.06 (0.61)
MAO-125-BB	Minimum	50 (0.79)	8.27 (0.12)
	Maximum	150 (2.38)	10.34 (0.15)
MAO-250-AA	Minimum	100 (1.59)	8.27 (0.12)
	Maximum	500 (7.93)	9.65 (0.14)
MAO-250-BB	Minimum	260 (4.12)	10.34 (0.15)
	Maximum	1800 (28.54)	20.00 (0.29)

CALIBRATION IN WATER

MODEL	ML/MIN (GPH)	VDC	Hz	mA	PORTS FNPT
MAO125XAA	0	0	0	0	1/8"
	20 (0.3170)	1	40	4	
	32.5 (0.5151)	2	80	8	
	45 (0.7133)	3	120	12	
	57.5 (0.9114)	4	160	16	
MAO125XBB	0	0	0	0	1/8"
	50 (0.7925)	1	40	4	
	75 (1.1888)	2	80	8	
	100 (1.5850)	3	120	12	
	125 (1.9813)	4	160	16	
MAO250XAA	0	0	0	0	1/4"
	100 (1.5850)	1	40	4	
	200 (3.1701)	2	80	8	
	300 (4.7551)	3	120	12	
	400 (6.3401)	4	160	16	
MAO250XBB	0	0	0	0	1/4"
	250 (3.9626)	1	40	4	
	638 (10.1125)	2	80	8	
	1025 (16.2466)	3	120	12	
	1413 (22.3965)	4	160	16	

CE Recognized 73/23/EEC/93/68/EEC

Recognized File E75356

MAO Series

Monitoring Lower Flows of Corrosive and Non-Corrosive Liquids.

ELECTRICAL SPECIFICATIONS

POWER REQUIREMENTS:

VOLTAGE: REGULATED 15 – 30 VDC

CURRENT: 250 mA

OUTPUTS:

ANALOG: 0 – 5 VDC,

Minimum Load Impedance: 5k ohm in parallel with 250pf

DIGITAL:

200 Hz, Square wave 50% duty cycle TTL compatible output.

CURRENT LOOP:

Current Loop: 4 - 20 mA

Loop Load : 100Ω ±1% 1/4 watt

WIRE CONNECTION:


RED – (+)

BLACK – (Common)

WHITE – (Frequency)

GREEN – (Voltage)

ORANGE – (Current)

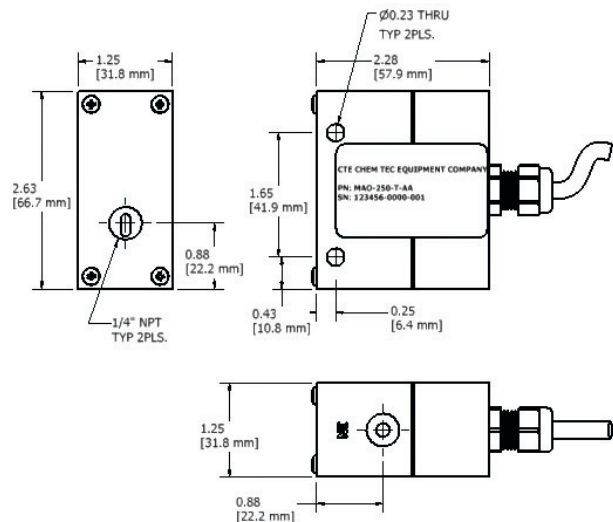

HOW TO ORDER

(Sales@ChemTec.com | (800) 222-2177)

Model	Size	Materials	Flow Range
MAO	125	T Teflon®	(See Chart)
	250	B Brass	AA
		S Stainless Steel	BB



INSTALLATION

Control valves should be placed downstream of the MAO flow meter. The flow meter should never be installed so that it drains completely when flow ceases. When particles maybe present in the media, a filter should be installed ahead of the flow meter. It is advisable to filter to 10 microns. The MAO flow meter should not be located near ferrous material or near strong electro-magnetic fields.

The MAO flow meter is sensitive to velocity profile disturbances in the flow stream. It is advisable that straight lengths of 10 inside diameters upstream and 5 inside diameters downstream be used. All lines should be completely purged of air before use.

The use of pipe paste is not recommended. Use care when using Teflon tape to avoid shreds from entering the MAO flow meter.

MOUNTING

MAO-125-X-AA; Mount with INLET vertical, INLET port up, OUTLET port horizontal. All other models mount with INLET port vertical, INLET port down, OUTLET port horizontal.